



便携式多路可调电源

电池规格

电池规格：3.7V 18650锂离子充电电池 x 4。
支持平头和尖头两种18650电池。电池长度分别为65mm与67mm，只是安装松紧程度稍有不同。
(注：产品不配电池，电池需单独购买。)

18mm
65mm
平头

18mm
67mm
尖头

功能操作示意图

注：
安装电池请注意
正负极方向。

3.7V 18650电池x4 ①

1V~20V电压显示 ②

电源输出开关 ③

USB 5V 输出 x2 ④

1V~20V可调输出 ⑤

9V/12V/24V输出 ⑥

USB 5V充电口 ⑦

电源开关 ⑧

旋转：1V~20V 电压调节
短按：切换位数
长按：锁定/解锁 ⑨

规格参数

产品名称：便携式多路可调电源
产品SKU：FIT0674
充电端口：最大5V/3A TYPE-C接口
充电时长：约4小时(实验室数据，采用2300mAh电池作为测试样本)

USB端口：	USB-A接口	额定电压：5.2V	电压精度：3%	额定电流：3A	峰值电流：5A
9V端口：	DC2.1接口	额定电压：9.2V	电压精度：3%	额定电流：2.5A	峰值电流：3A
12V端口：	DC2.1接口	额定电压：12V	电压精度：3%	额定电流：2A	峰值电流：2.5A
24V端口：	DC2.1接口	额定电压：24V	电压精度：3%	额定电流：600mA	峰值电流：1A
可调端口：	DC2.1接口	额定电压：1V~20V	电压精度：3%	电压分辨率：0.1V	
		额定电流：1A (20V)~2.5A(1V)		峰值电流：1.5A(20V)~3A(1V)	

公司信息


制造商：上海智位机器股份有限公司
公司地址：中国·上海浦东新区博云路2号浦软大厦603室 (201203)
电话：021-61620183
Email：service@dfrobot.com
网址：www.DFRobot.com.cn

警告：
内含细小部件，不适合3岁以下儿童使用。

dfrobotcn

dfrobot

dfrobotcn

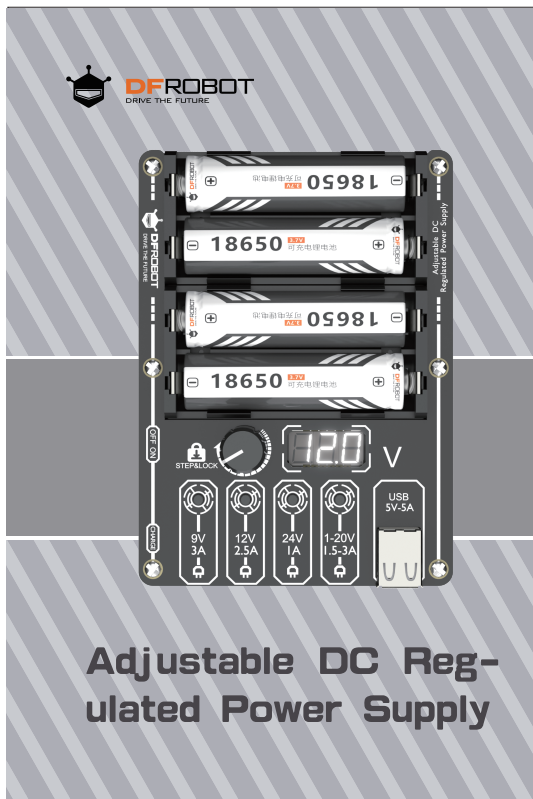

Adjustable DC Regulated Power Supply

Battery Specification

Battery Specification: 3.7V 18650 Li-ion battery x4
Both flat top(65mm) and button top(67mm) 18650 batteries are supported. They only differ slightly in tightness when installing.
(Note: batteries are not included.)

18mm
65mm
Flat Top

18mm
67mm
Button Top

Function Overview

Note:
Ensure batteries are inserted with the correct polarity.

3.7V 18650 Battery x4 ①

1~20V Voltage Display ②

Power Output Switch ③

USB 5V Output x2 ④

Rotation: 1~20V Voltage Adjustment
Short Press: Switch place value
Long Press: Lock/unlock ⑨

1~20V Adjustable Output ⑤

9V/12V/24V Output ⑥

5V USB Charging Port ⑦

Power Switch ⑧

Product Specification

Name: Adjustable DC Regulated Power Supply
SKU: FIT0674
Charging Port: Max 5V/3A Type-C Connector
Charging Time: About 4h (Experimental data, using 2300mAh batteries as test samples)

USB Port:	USB-A	Rated Voltage: 5.2V Voltage Accuracy: 3%	Rated Current: 3A Peak Current: 5A
9V Port:	DC2.1	Rated Voltage: 9.2V Voltage Accuracy: 3%	Rated Current: 2.5A Peak Current: 3A
12V Port:	DC2.1	Rated Voltage: 12V Voltage Accuracy: 3%	Rated Current: 2A Peak Current: 2.5A
24V Port:	DC2.1	Rated Voltage: 24V Voltage Accuracy: 3%	Rated Current: 600mA Peak Current: 1A
Adjustable Port:	DC2.1	Rated Voltage: 1~20V Voltage Accuracy: 3%	Voltage Resolution: 0.1V Rated Current: 1A(20V)~2.5A(1V) Peak Current: 1.5A(20V)~3A(1V)

Company Information

Manufacturer: Zhiwei Robotics Corp.
Address: Room 603, 2 Boyun Road, Pudong, Shanghai 201203 P.R.China
Tel: 021-61620183
Email: service@dfrobot.com
Website Address: www.DFRobot.com

Warning:
The product contains small parts and should not be used by children under 3 years old.

dfrobotcn

dfrobot

dfrobotcn